



PM-5

4 TONES CONTROL.

The PM-5 moduel is a previous amplifier to control tones including a Bandanxall corrector circuit, and with an active control of itself by re-supply to warranty a constant win in frequencies margin. Potentiometers inserted in the printed circuit board (PCB) to avoid to wire them.

TECHNICAL CHARACTERISTICS.

Voltage.....	12 V. D.C. (9 - 24V)
Medium Consumption.....	12 mA.
Frequencies Margin.....	10-40.000 Hz.
Input Sensitivity.....	100 mV.
Input Impedance.....	100 K .
Low Control.....	± 22 dB.
High Control.....	±22 dB.

OPERATING.

Once the power supply connection made, we suggest you how to connect the Tonality Control (PM-5) with a Previous Amplifier Mono PM-1, PM-2, PM-4 or PM-7 according to your uses and the volume potentiometer. The presented assembly is an effective Mono Preamplifier which could be used for any "CEBEK" Power Stage.




MONO PREAMPLIFIER.

Ref. Full9815_Ang.

PM-5

GENERAL WIRING MAP.

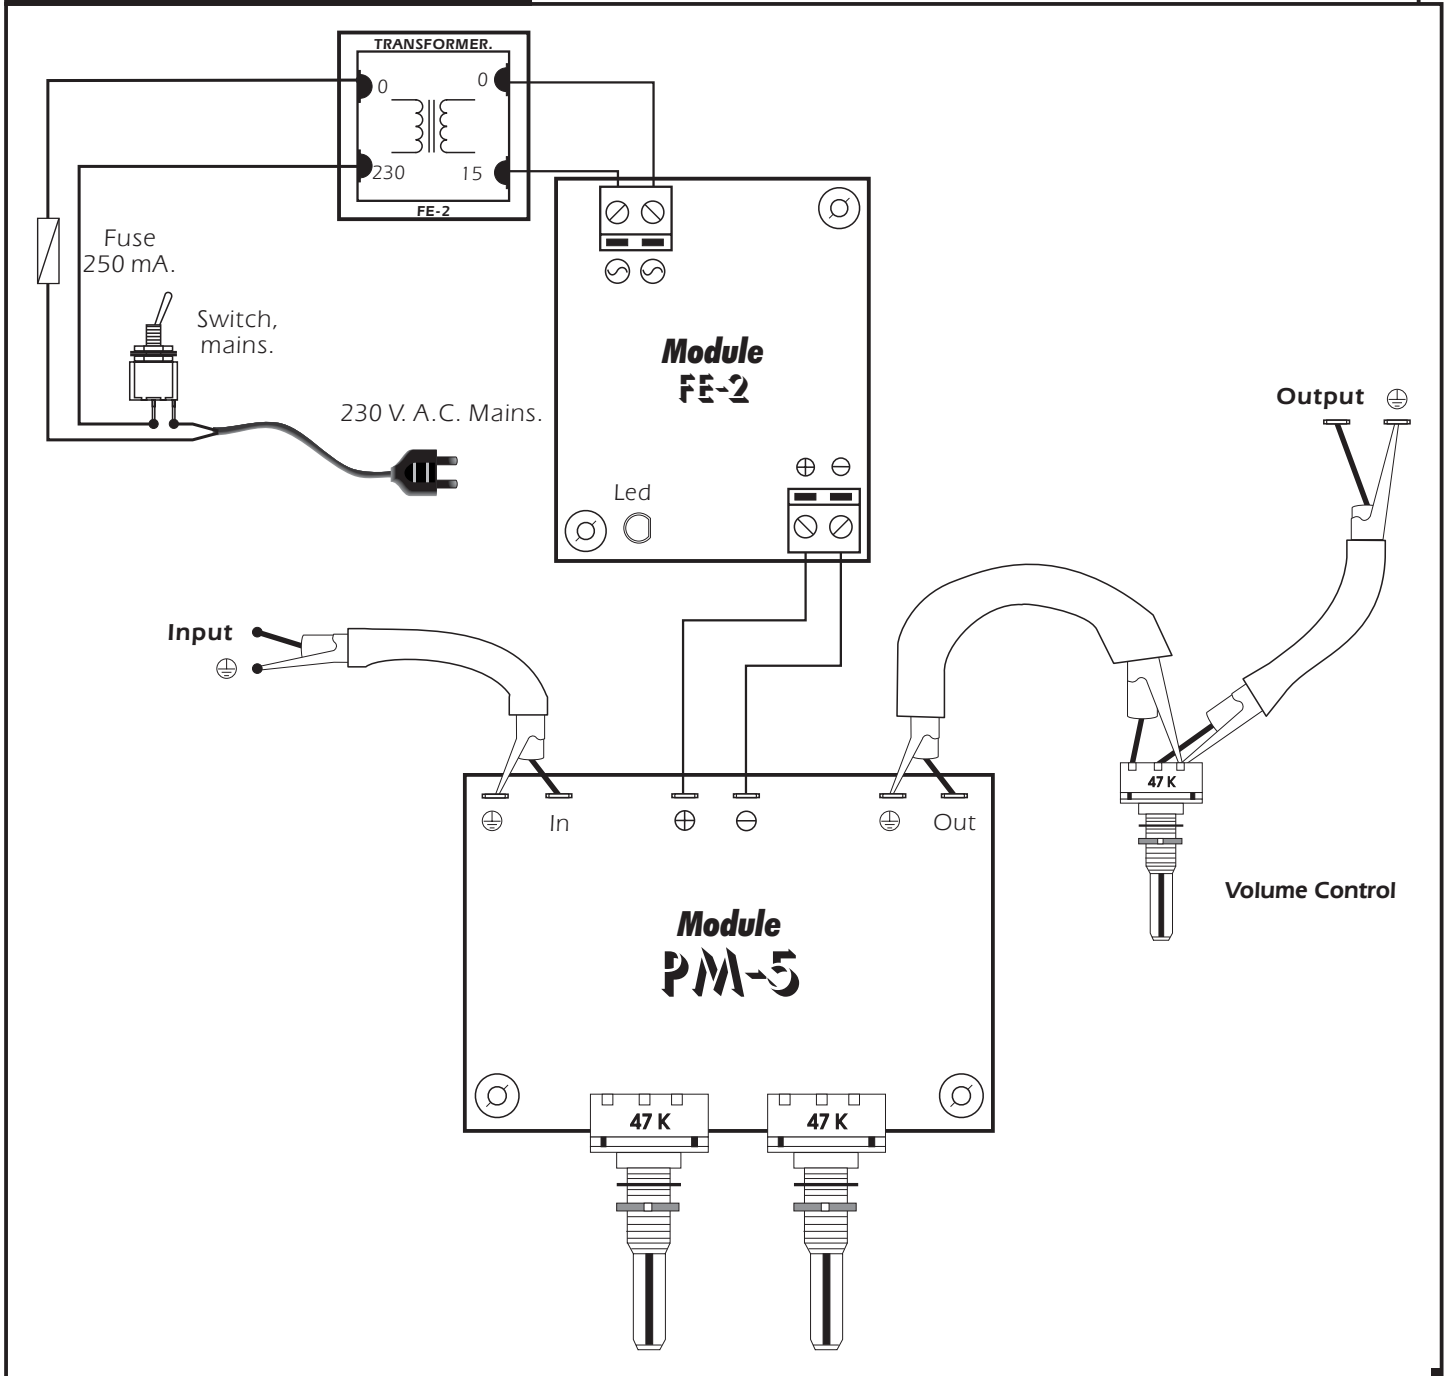

TECHNICAL SUPPORT AND INFORMATION.

For any questions or more information:

By Fax. (24h.) +34.3. 432.29.95

By Mail: C/ Quetzal, 17-21, Entlo. 2º (08014) BARCELONA - SPAIN.

By E-Mail: sat@fadisel.com

Keep you invoice. For any repairing could you send this with module. Else, the module will lost the warranty.

**MORE 300
MODULES.**

All the module's CEBEK have **3 years of total warranty** in thechnical repairing, and spares from the date of buy.

CEBEK is trade make of FADISEL S.L. more than 300 module's are available in stock for any purpose **request our CATALOGUE**, or visit our Web.

[Http://www.fadisel.com](http://www.fadisel.com)

WARRANTY

**3
YEARS**