





C-0166E

Panel solar 16,8 V / 20 W

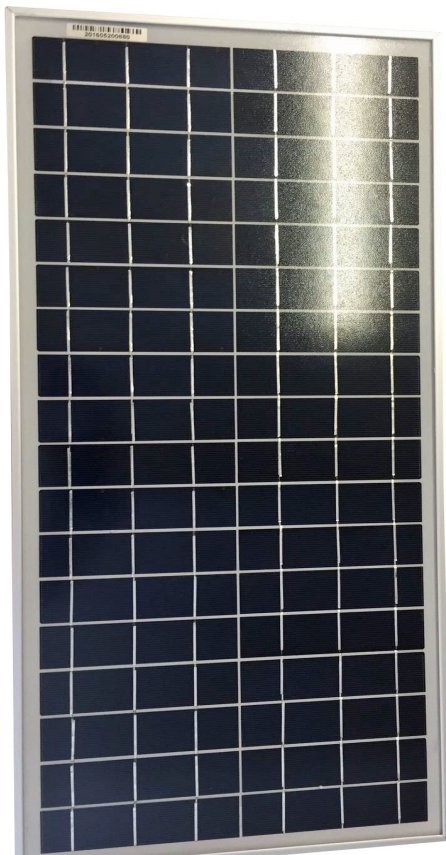

TECHNICAL CHARACTERISTICS

Potencia nominal Pmax(W)	20 W
Nominal Power Pmax(W)	
Tolerancia / Tolerance	-3%/+5%
Tipo de célula Kind of cell	Policristalina Polycrystalline
Células por módulo Cells per module	2X18=36
Eficiencia de conversión Conversion efficiency	11,11%
Tensión máx. potencia Mpp Vmp (V) Voltage Mpp Vmp (V)	16,8V
Corriente máx. potencia Mpp Imp (A) Current Mpp Imp (A)	1,19 A
Tensión circuito abierto Voc (V) Voltage open circuit Voc (V)	21,0 V
Corriente cortocircuito Isc (A) Short circuit current Isc (A)	1,32 A
Longitud (mm) / Length(mm)	636
Anchura (mm) / Width(mm)	283
Espesor (mm) / Thickness (mm)	25
Peso (kg) / Net weight	2,2
Tipo de marco / Kind of frame	Alu.

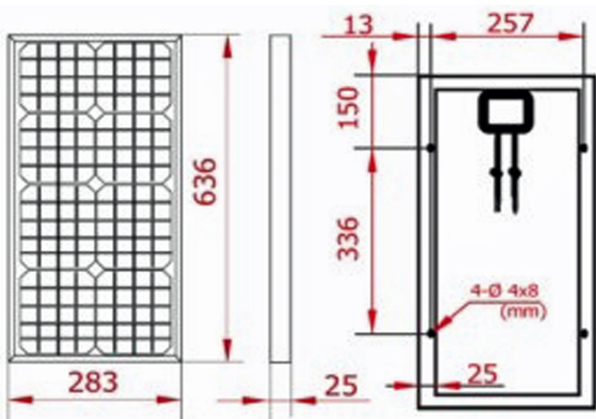

info@fadisel.com
www.fadisel.com