



P-3

STEREO SELECTOR FOR 4 INPUTS

The P-3 is a stereo selector for 4 inputs - 1 output. Thanks to the incorporated switch, you could select to the output any of 4 injected input signals.


Specially indicated for applications requiring a small and low noise level. It includes protection against polarity inversion, leds to indicate the channel, rotative switch and terminals to make more easy the assembly.

TECHNICAL CHARACTERISTICS.

Voltage	From 9 up to 18 V. DC.
Minimum Consumption	5 mA.
Maximum Consumption	15 mA.
Maximum input signal	8 Vpp.
Crosstalk	70 dB.
Gain	1
Total Harmonic Distorsion	0.03%.
Protection against polarity inversion	Yes.
Sizes	82 x 75 x 40 mm.

OPERATING.

POWER SUPPLY. The P-3 circuit had to be supplied from 9 up to 18 V DC power supply correctly filtered. We recommended you the FE-2 power supply which has been developed to perfectly answer to the circuit needs. Install a fuse and a switch as it is indicated on the schedule. Both are necessary for the module's protection as well as for your own safety, as it is required by the "CE" regulations. Connect the positive of the power supply to the positive terminal indicated in the wiring map, then connect the negative of the power supply to the negative terminal indicated in the circuit. **Verify that the assembly is correct.**

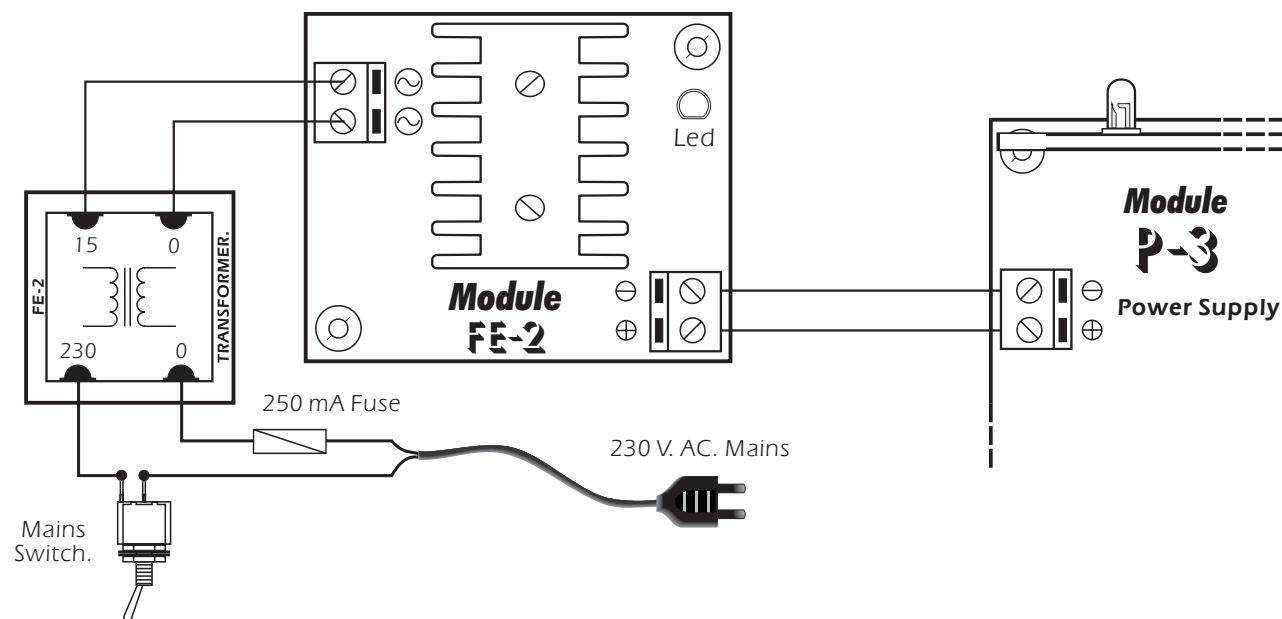

OPERATING. Once these connections done, you could supply the module. Then, automatically one of 4 included led will light on. On the P-3's front panel, you have a rotative switch with four different positions, corresponding to each channel of the module. According to the switch position, the module will inject to the output the selected input. The led corresponding to the selected channel will light on.

INSTALLATION. Install the module into a metallic enclosure correctly ventilated. For the cabling, you have to use low frequency shielded cable and connect the central wire to the enclosure.




STEREO PRE-AMPLIFIER

Ref. Full9904


P-3

OPERATING.

P-3' Front Panel. Turn the switch to select the required input channel to the output.

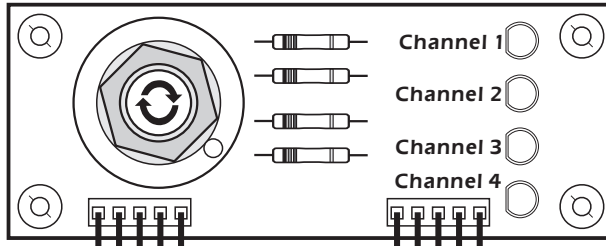

GENERAL WIRING MAP.

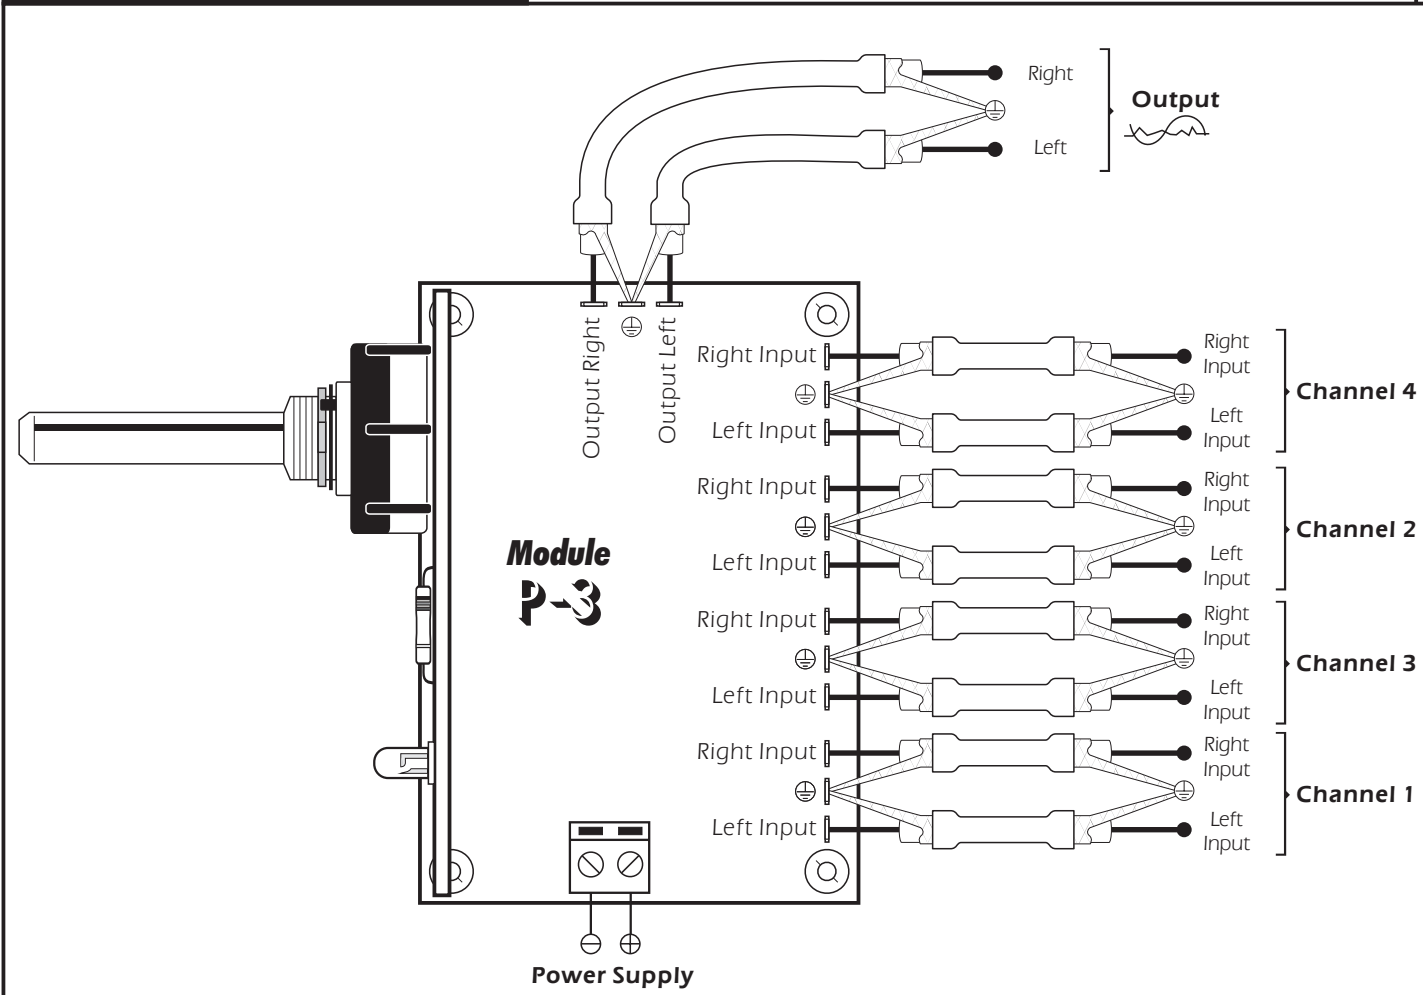

TECHNICAL CONSULTATIONS.

If you have any doubt, you could contact your wholesaler or our Technical Department.
- Via E-Mail, sat@cebek.com | by mail PO Box 23455 - 08080 BARCELONA - SPAIN.

**MORE 300
MODULES.**

All the module's CEBEK have **3 years of total warranty** in thecnical repairing, and spares from the date of buy.

CEBEK is trade make of FADISEL S.L. more than 300 module's are available in stock for any purpose **request our CATALOGUE**, or visit our Web.

[Http://www.cebek.com](http://www.cebek.com)

WARRANTY

**3
YEARS**