



Network filter

Filtre réseau

Filtro de red

C-8202

3. CHARACTERISTICS:

(1) VOLTAGE RATING.....115/250VAC

(2) CURRENT RATING:

A. @ 115VAC.....6A RMS Max.

B. @ 250VAC.....6A RMS Max.

(3) OPERATING FREQUENCY: 50/60Hz

(4) LEAKAGE CURRENT: EACH LINE TO GROUND

A. @ 115VAC/60Hz.....0.4mA Max.

B. @ 250VAC/50Hz.....0.8mA Max.

(5) HIPOT RATING(FOR ONE MINUTE)


A. LINE TO GROUND.....2250VDC

B. LINE TO LINE.....1450VDC

(6) IR: 50M ohm AT 500VDC ANY INPUT OR OUTPUT TO GROUND

(7) TEMPERATURE RANGE: -25°C~+85°C

4. ELECTRICAL SCHEMATIC:

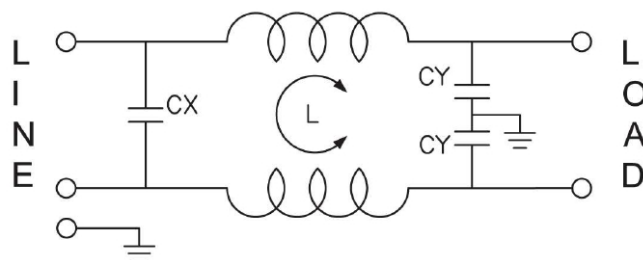

L:2x0.8mH
Cx:0.1uF(X2)
Cy:3300pF(Y2)



5. SAFETY COMPLIANCE:

CE :2011NT0616551

CQC :CQC14001106207

TUV :B141289931001

UL :E471748

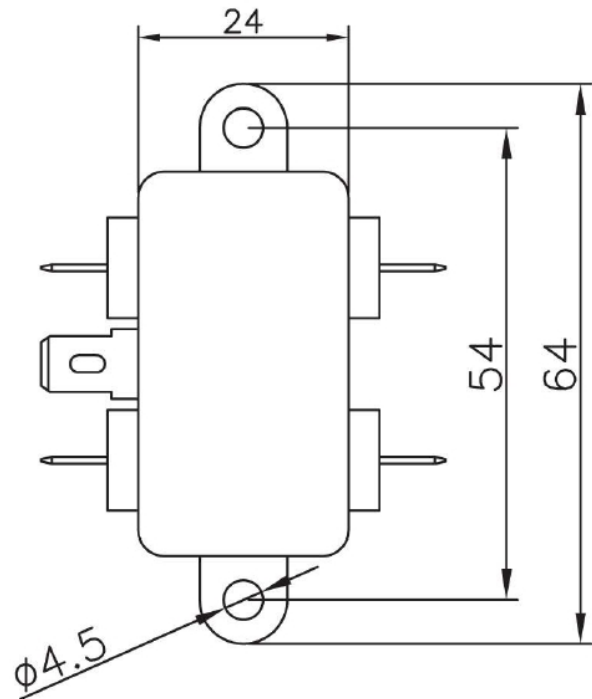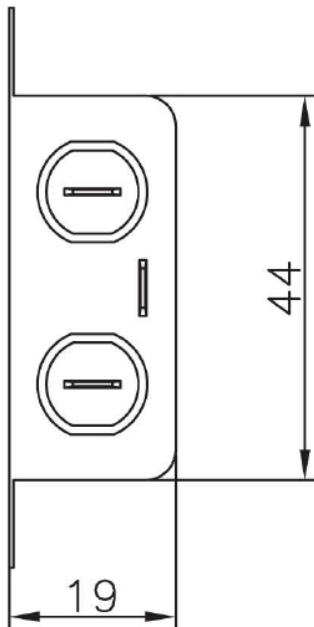

0 ~ 10	± 0.3
10 ~ 100	± 0.5
100 ~ 150	± 0.8
150 ~ 200	± 1.0
Dimension Limit	Tolerance