




Diagram of the 3 Vdc 1.34w flat motor

Schéma du moteur plat 3 Vdc 1,34w

Esquema del motor plano de 3 Vcc de 1,34w

Esquema del motor pla de 3 Vcc de 1,34w

C-6040

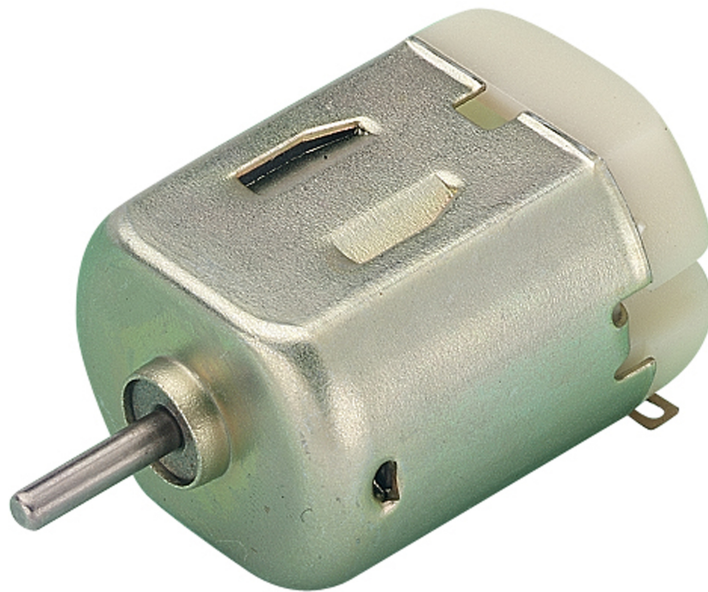

MOTOR OUTGOING SPECIFICATION

Model No. : 130-2270-38

Sample No. :

- 1.Motor Type:
马达类型

Small PMDC motor
微型直流马达
- 2.Standard Operating Conditions:
标准工作条件

2-1 Rated Voltage(额定电压):

3.0V DC CONSTANT between motor terminals(端子电压3.0V)

2-1 Direction of Rotation(旋转方向):

CCW, when viewed from output shaft side(从输出轴端看CCW)
- 3.Electrical Characteristics(at initial stage after 30 seconds run-in):
电气特性(起动30秒后初始阶段)

3-1 No Load Current(空载电流):

0.4A_max

3-2 No Load Speed(空载转速):

16000±10%rpm

3-3 Rated Load(tested with fan mm):
额定负载(mm风叶)

11.9g.cm

3-4 Rated Current(额定电流):

1.5A_max

3-5 Rated Speed(额定转速):

12400±8%rpm

3-6 Noise(噪音):

30cm≤68dB

3-7 Motor Characteristic Curve(马达特性曲线):

See Motor Performance Curves And Characteristics(看马达特性曲线图)
- 4.Mechanical Characteristics:
机械特性

4-1 External Apperance(外形):

See Outline(参外形图)

4-2 End Play(端位):

0.05~0.45mm

4-3 Runout of Shaft Extension(轴突端晃动):

0.02mm_max

CONFIRMED & ACCEPTED BY CUSTOMER (客户接受确认)
COMPANY,CHOP & SIGNATURE (盖章签名)

PREPARED: _____ CHECKED: _____ APPROVED: _____